


TP 32



Equipped with a water lock, this profile offers extra protection against water infiltration at the side overlap. Suitable for most roofs with slopes down to 14 degrees.


- **Material:** Hot-dip galvanized painted steel sheet
- **Thickness:** 0.50 – 0.60 – 0.65 – 0.75 mm
- **Weight:** 4.70 – 5.64 – 6.11 – 7.05 kg/m²
- **Effective Width:** 1,020 mm
- **Length:** 750 – 10,000 mm
- **Profile Height:** 32 mm
- **Water Lock:** Yes

[Request quotation](#)

[Contact us](#)

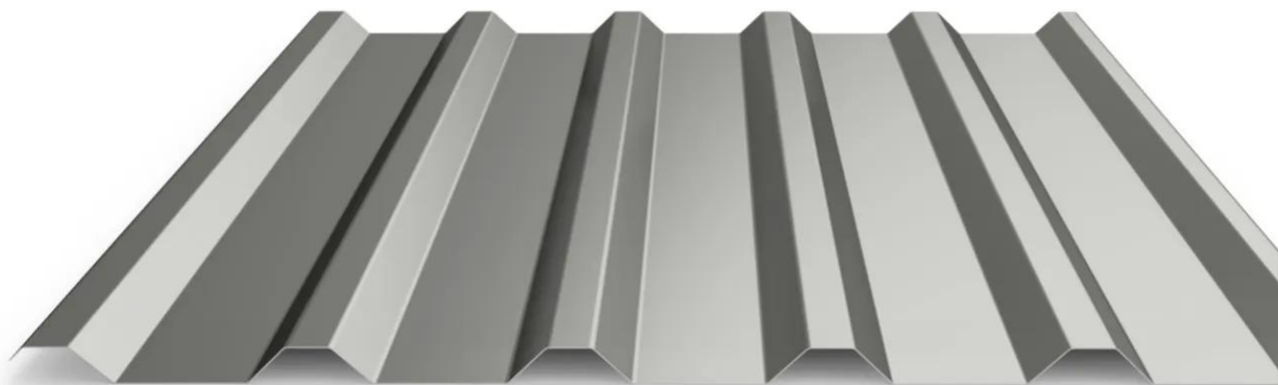

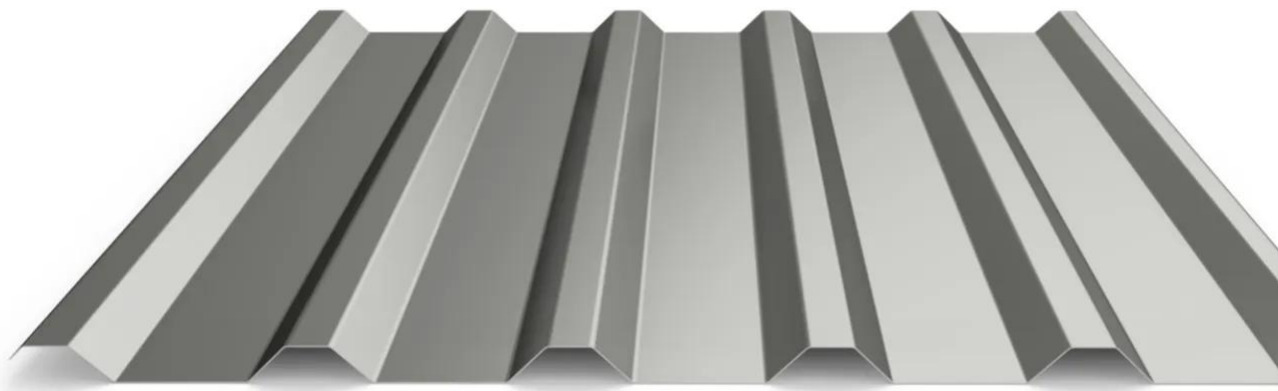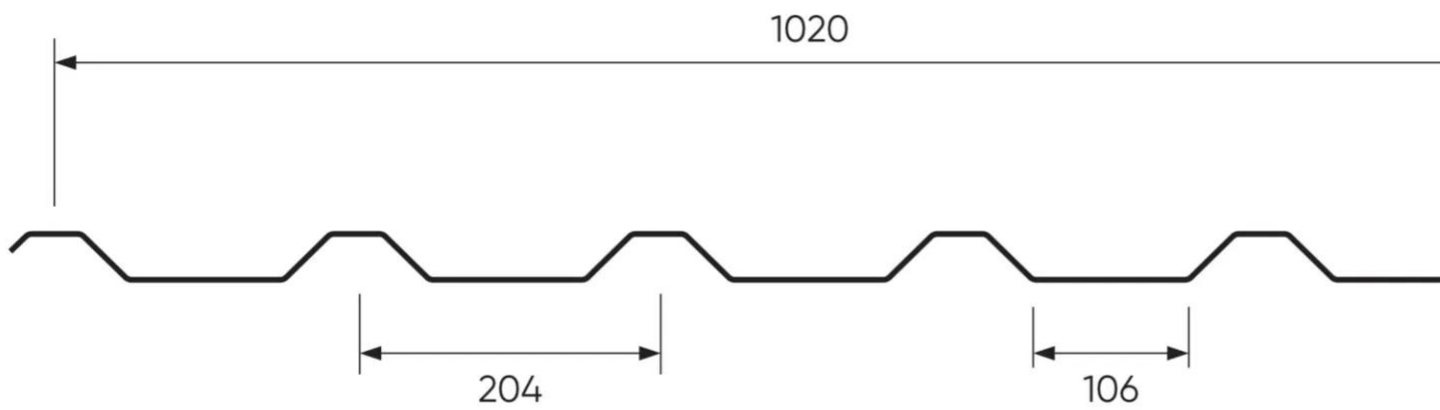

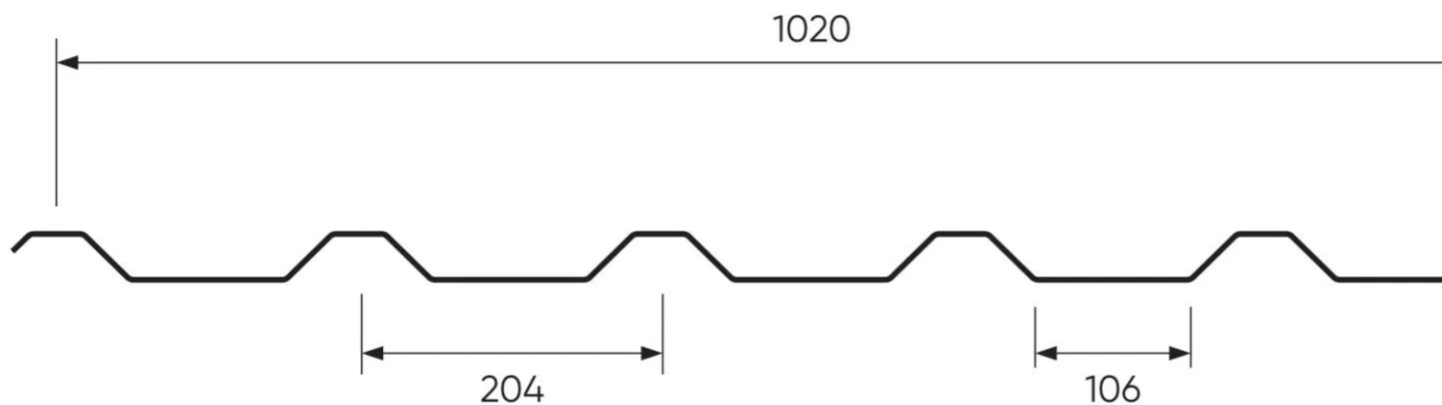

Properties

Accessories


[Request informations](#)

Related products

[Request informations](#)


Technical documents

Documents

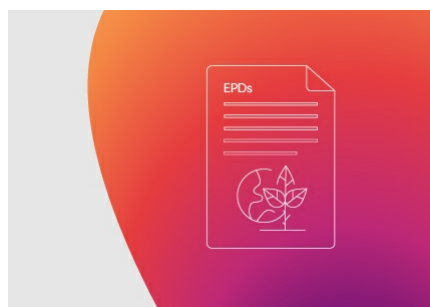

EPD coated low profiles

[View document](#)

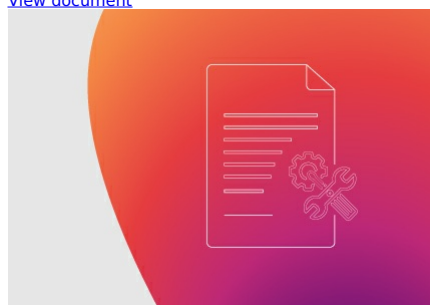

Monteringsanvisning TP

[View document](#)

Technical & commercial documentation



Produktkatalog Sverige

[View document](#)