

TP127i is ideal for structures requiring high load-bearing capacity over longer spans.

The profile thickness is calculated based on the specific requirements. In this case, the profile is used as an insulated exterior roof, with side overlaps occurring in the profile trough. Installation according to our guidelines ensures a strong and stable assembly.

The profile is an excellent choice for applications such as canopy roofs, carports, and more, with span requirements of up to 8 meters. The sheet can also be placed over multiple spans or with extended overlaps to create the most efficient solution.


- **Material:** Hot-dip galvanized painted steel sheet / Galvanized
- **Thickness:** 0.70 – 1.50 mm
- **Weight:** 8.58 – 18.42 kg/m<sup>2</sup>
- **Effective Width:** 960 mm
- **Length:** 1,500 – 15,000 mm

[Request quotation](#)



[Contact us](#)




•

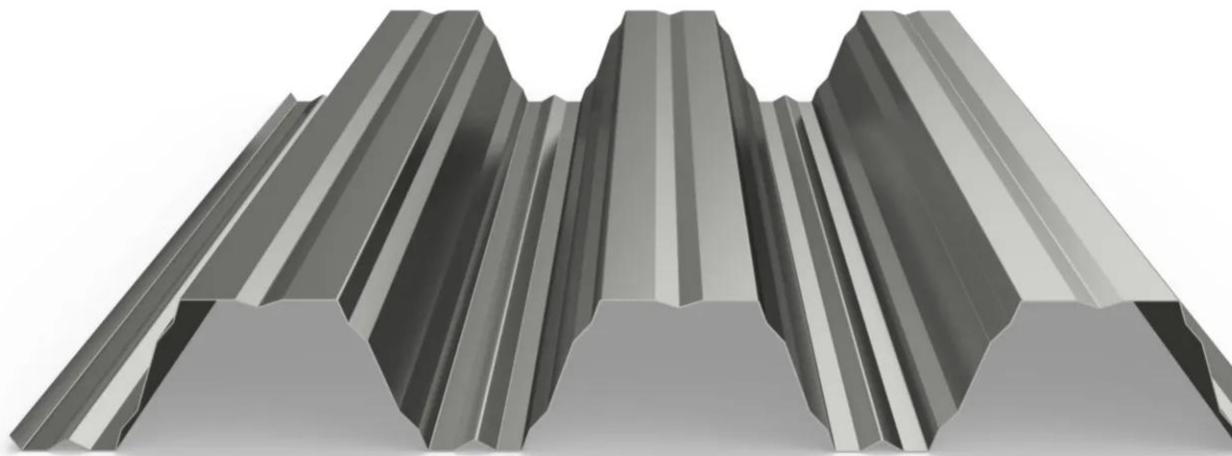

•

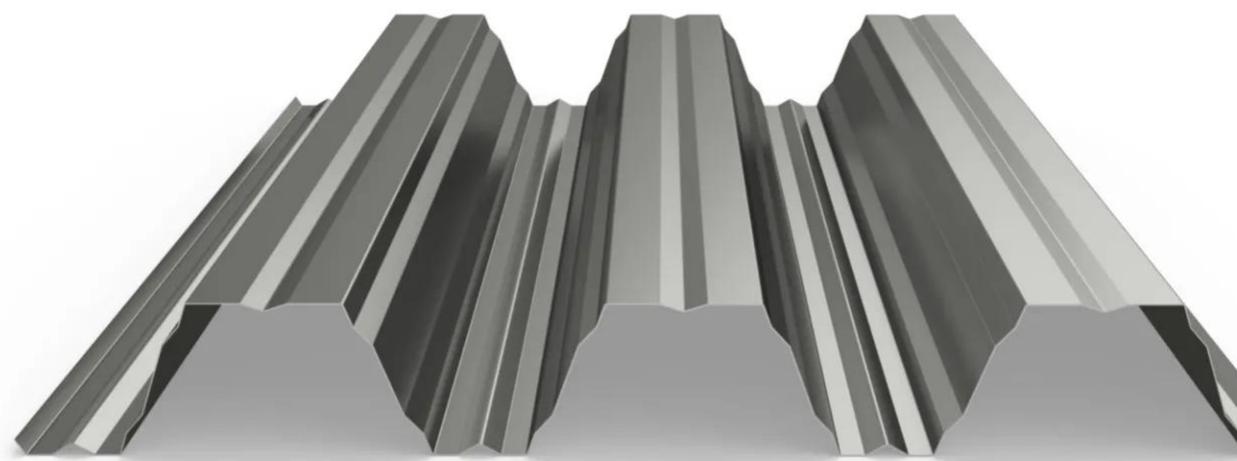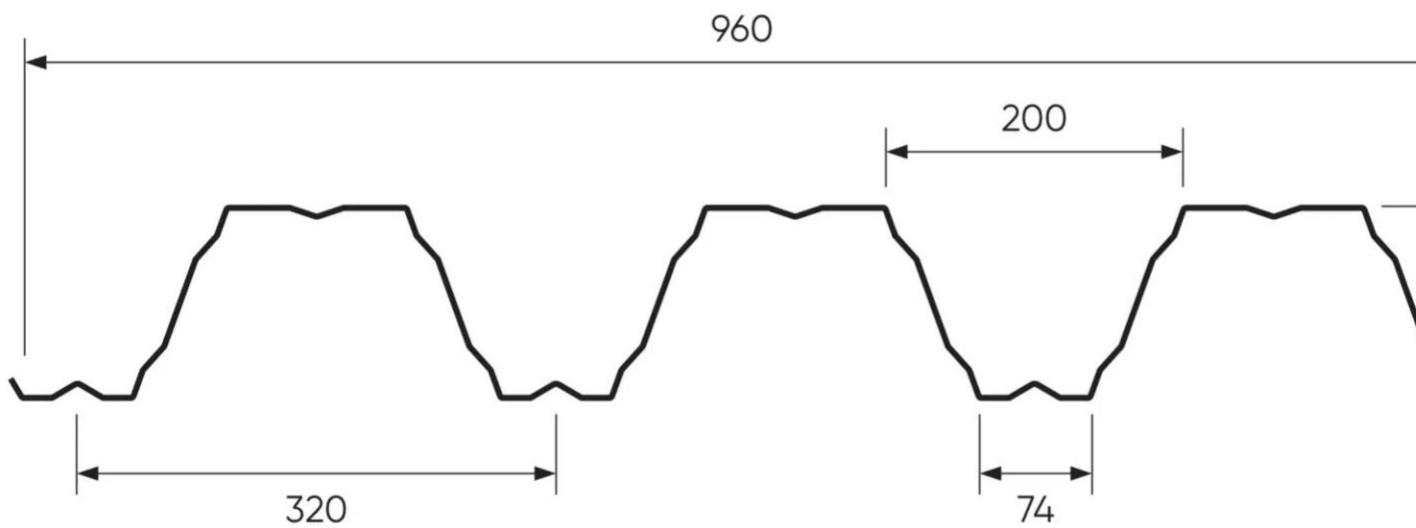

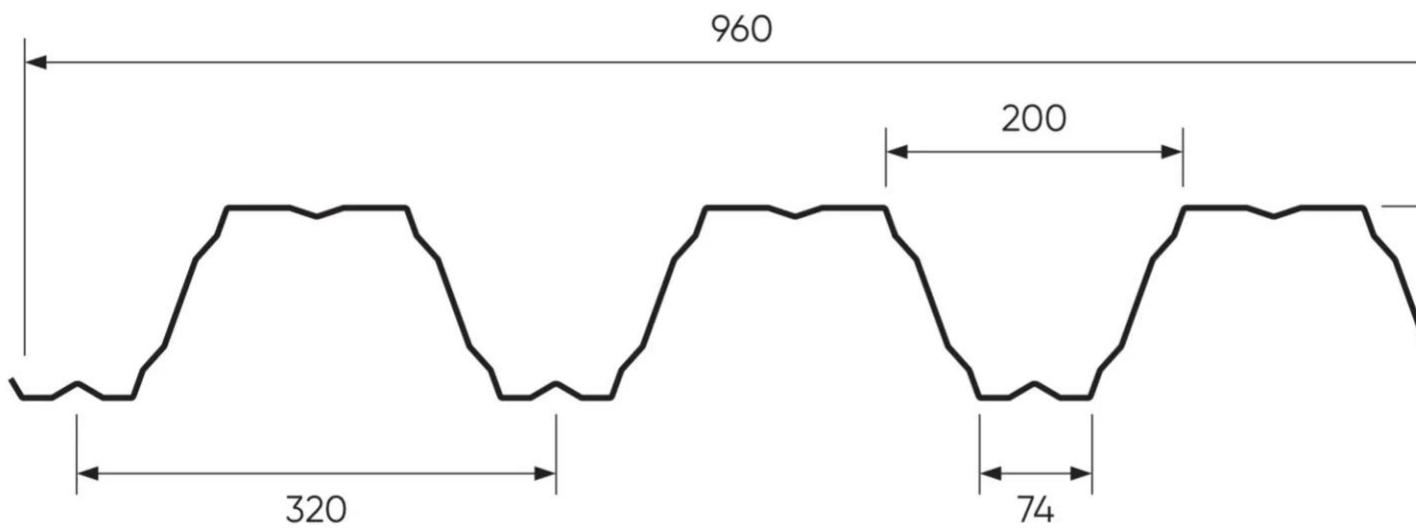

## Properties

## Accessories

[Request informations](#)

## Related products

[Request informations](#)

## Technical documents

[Request informations](#)

## Technical & commercial documentation



Produktkatalog Sverige

[View document](#)